

Floating tree FOUNTAIN PUMP

- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/2 HP / 400W
- PH : 6~8
- Motor insulation : B Class
- Protection class : IP68
- Diameter : 1.5 / 2 inch (40 & 50mm)

Features


1. Easy assembly for DIY market with modular connection.
2. Water proof extension power cable junction box connect power cable for suitable length with easy installation.
3. Easy installation and setting: Water depth limitation is 60cm.
4. Various nozzle pattern: Replace different pattern of nozzle easily.

Applications

1. Fountain application
2. Lake water pumping

Dimension

Dimension		
Model	H	W
	mm	mm
Floating Tree	510	796

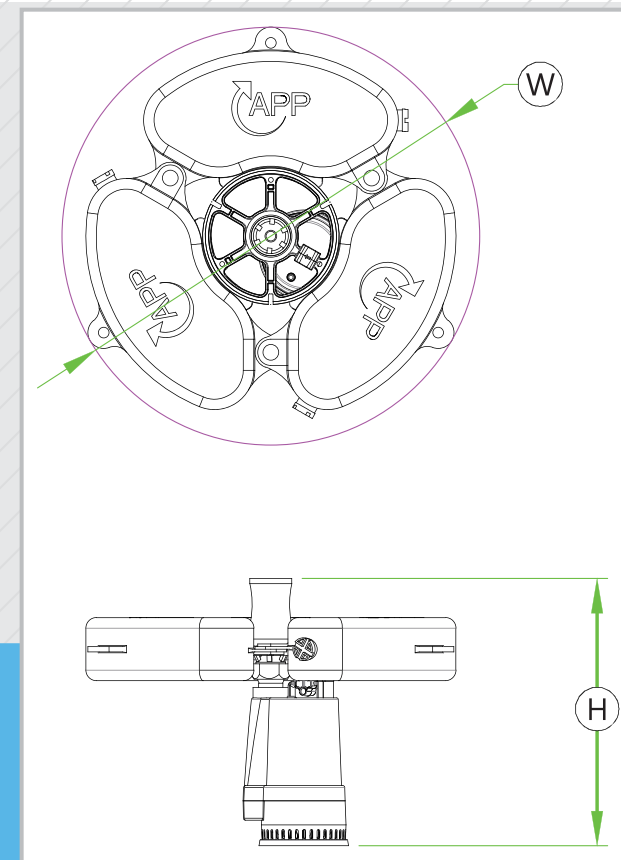

Specification

Model	Power		Outlet		Fountain height (cm)	Fountain diameter (cm)
	HP	W	inch	mm		
FT-0540	1/2	400	1.5"	40	50~150	100~450
FT-0550	1/2	400	2"	50	30~100	50~250

Standard Accessories

Model No.	Accessories	Optional Accessories
FT-0540	Junction box	Sprinkler
FT-0550	Junction box	Sprinkler

