
GS

SCREW GRINDER PUMPS



- Liquid temperature : 0~40℃ / 32~104°F
- HP range : 1.5HP / 1.1KW
- PH : 6~8
- Rated Speed : 1450 / 1750 rpm
- Protection class : IP68
- Maximum depth : 8M

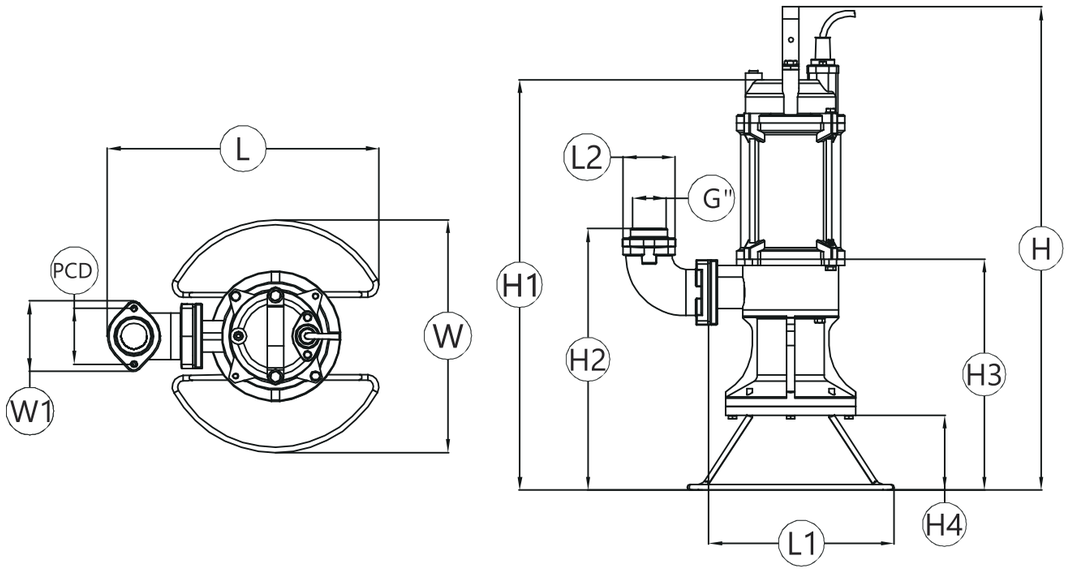


Features

1. All cast-iron grinder pump with high-efficiency, heat-conductive materials for improved cooling and durability.
2. Cutter Material: SUS440C hardened blade easily slices through solids without clogging.
3. Spiral impeller can transfer high viscous liquid for high head.

Applications

1. Domestic sewage and blackwater disposal
2. Animal husbandry wastewater and effluent treatment
3. Leather-processing wastewater and industrial effluent disposal

Curve

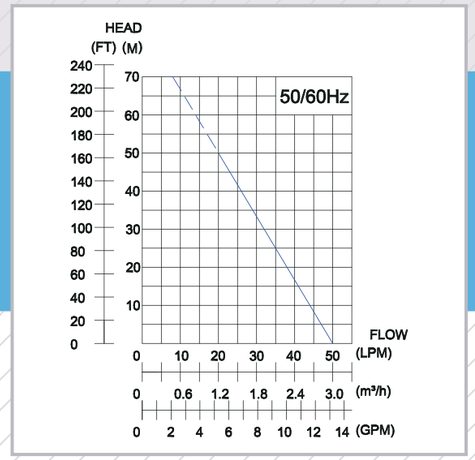

Dimension

Dimension												
Model	L	L1	L2	W	W1	H	H1	H2	H3	H4	PCD	G
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch
GS-15	411	280	80	316	106	721	612	389	342	107	84	2 1/4

Specification

Model No.	Output		Outlet		Max Flow(LPM)	LPM Flow @ Head					Weight	Pedestal Type
	HP	KW	mm	inch		10M	20M	30M	40M	50M	Kg	
GS-15	1.5	1.1	32	1-1/4"	50	45	37	32	25	20	42	GD0257h

Standard Accessories

Model No.	Accessories
GS-15	Elbow、Flange

