APP

www.pumps.com.tw

SP series

4"&6" DEEP WELL PUMP
Stainless Steel Submersible Pump


- **4" stainlesss steel submersible borehole pump**
  SP - 05 / 10 / 18 / 25 / 40 / 75 m^3/h
- **6" stainlesss steel submersible borehole pump**
  SP - 17 / 30 / 46 / 60 m^3/h
- **100% SUS304 stainless steel made**











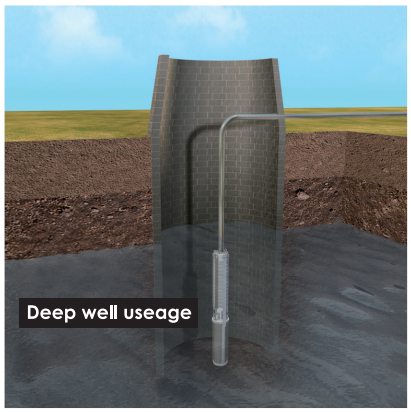

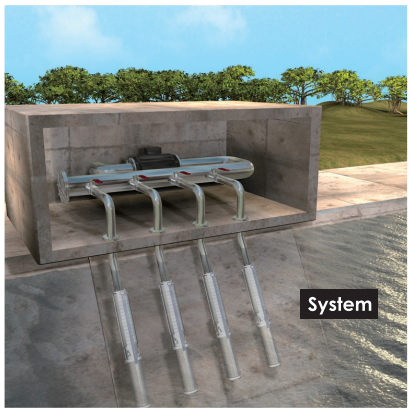

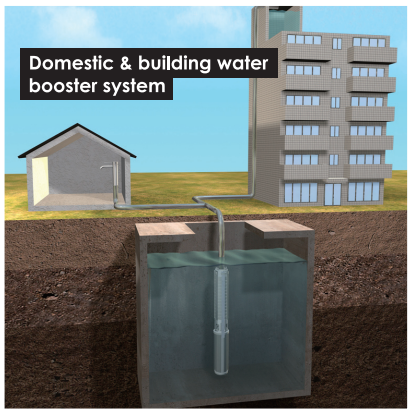


HUNG PUMP GROUP

WELL PUMP

HUNG PUMP GROUP


WELL PUMP

SP-05 Performance Curve

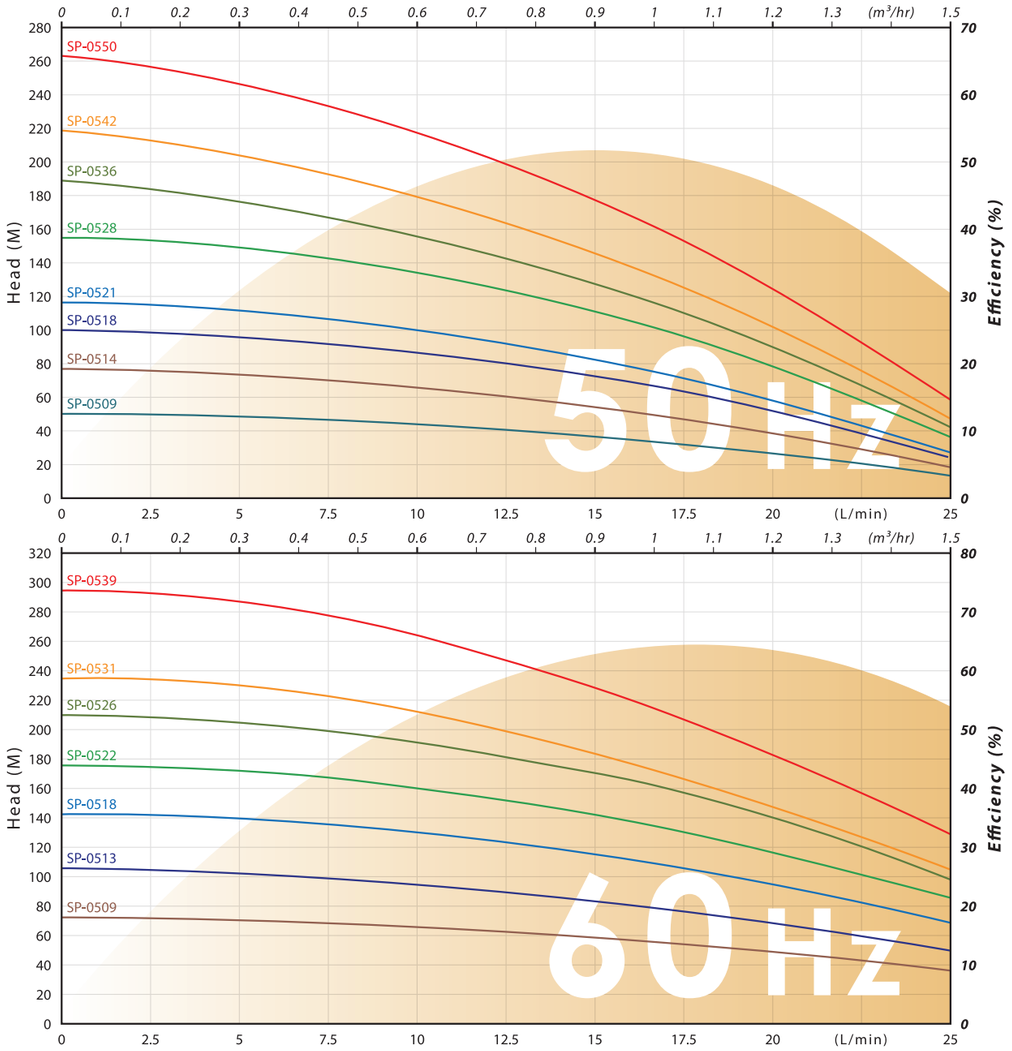


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-0550		262			162	1240	11.3	2	1.5
	SP-0542		219			134	1072	9.8	1.5	1.1
	SP-0536		189			117	946	8.6	1.5	1.1
	SP-0528		155			102	753	6.6	1	0.75
	SP-0521		116			76	606	5.2	0.75	0.55
	SP-0518		100			67	543	4.7	0.75	0.55
	SP-0514		77			50	459	4	0.5	0.37
	SP-0509	1 1/4	50	17	1	34	354	3.1	0.5	0.37
60Hz	SP-0539		295			215	1020	9.7	2	1.5
	SP-0531		235			173	816	7.4	1.5	1.1
	SP-0526		210			162	711	6.4	1.5	1.1
	SP-0522		176			135	627	5.6	1	0.75
	SP-0518		143			109	543	4.8	0.75	0.55
	SP-0513		104			79	438	3.8	0.5	0.37
	SP-0509		73			56	354	3.1	0.5	0.37

SP-10 Performance Curve

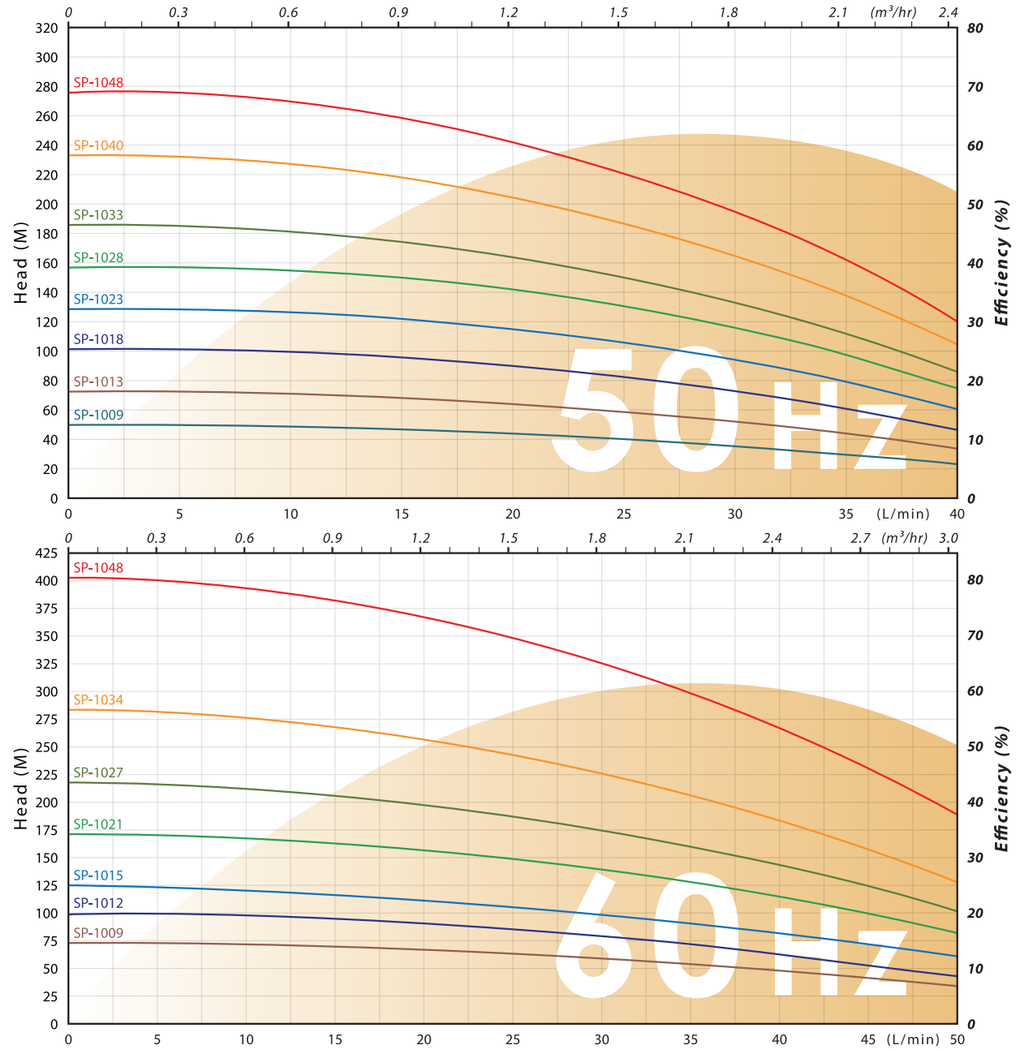


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-1048		278			176	1209	12.1	3	2.2
	SP-1040		233			150	1041	10.4	3	2.2
	SP-1033		186			121	858	8.1	2	1.5
	SP-1028		158			106	753	7	2	1.5
	SP-1023		129			86	648	6.2	1.5	1.1
	SP-1018		101			67	543	5.1	1	0.75
	SP-1013		72			48	438	4	0.75	0.55
	SP-1009	1 1/4	50	33	2	32	354	3.2	0.5	0.37
60Hz	SP-1048		403			308	1209	12.1	7.5	3.75
	SP-1034		284			213	879	8.3	3	2.2
	SP-1027		219			167	732	7	2	1.5
	SP-1021		171			132	606	5.7	1.5	1.1
	SP-1015		125			94	480	4.4	1	0.75
	SP-1012		98			75	417	3.8	0.75	0.55
	SP-1009		73			56	354	3.2	0.5	0.37

SP-18 Performance Curve

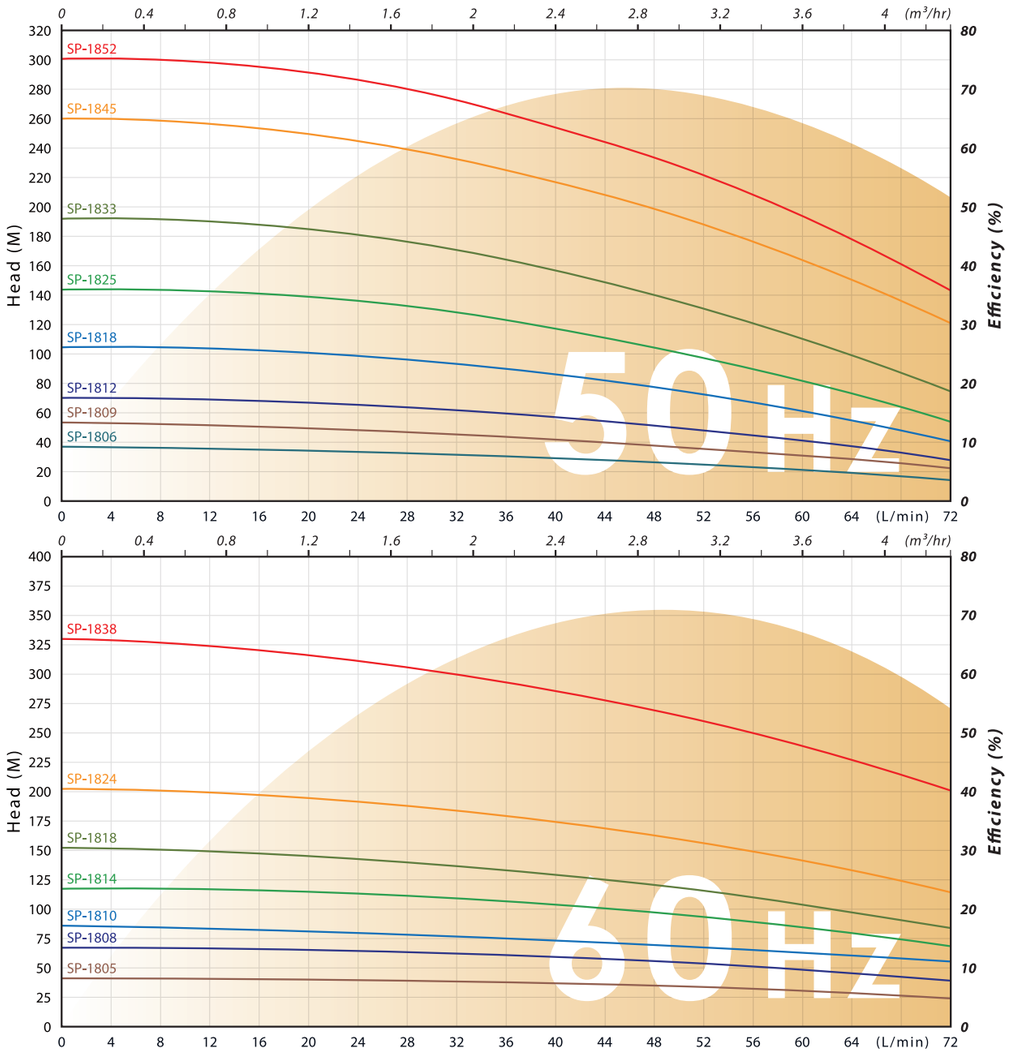


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-1852		312			229	1293	12.5	7.5	4
	SP-1845		268			194	1146	10.8	5	3
	SP-1833		198			137	858	7.9	3	2.2
	SP-1825		149			102	690	6.3	2	1.5
	SP-1818		108			75	543	4.9	1.5	1.1
	SP-1812		72			49	417	3.7	1	0.75
	SP-1809		54			37	354	3.1	0.75	0.55
	SP-1806	1 1/4	36	50	3	25	291	2.6	0.5	0.37
60Hz	SP-1838		329			267	999	10	7.5	4
	SP-1824		208			162	669	6.3	3	2.2
	SP-1818		155			121	543	5	2	1.5
	SP-1814		121			96	459	4.2	1.5	1.1
	SP-1810		87			68	375	3.5	1	0.75
	SP-1808		69			54	333	3	0.75	0.55
	SP-1805		43			34	228	2.4	0.5	0.37

SP-25 Performance Curve

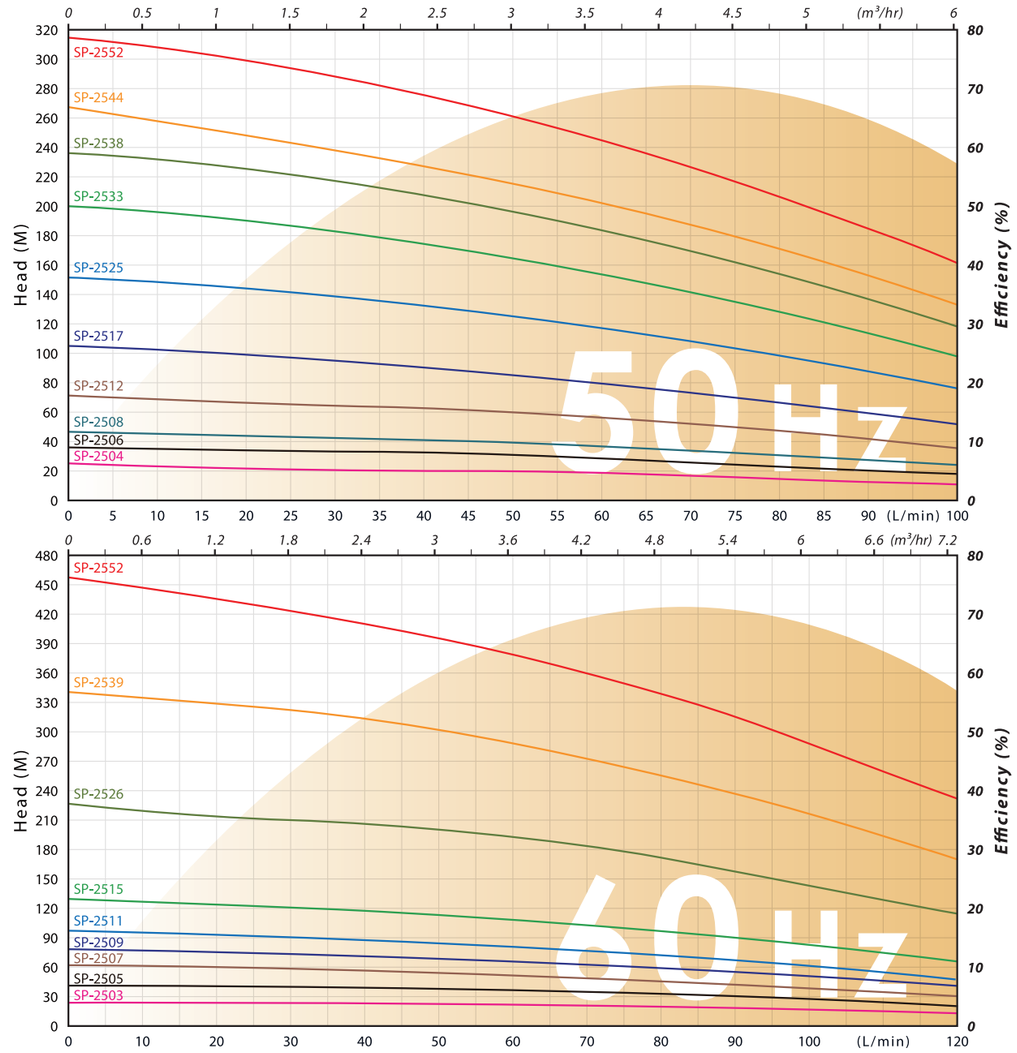


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-2552		317			200	1293	13	7.5	5.5
	SP-2544		267			166	1125	11	7.5	4
	SP-2538		238			150	999	9.7	7.5	4
	SP-2533		200			124	858	7.8	5	3
	SP-2525		152			94	690	6.4	3	2.2
	SP-2517		104			63	522	4.7	2	1.5
	SP-2512		73			46	417	3.7	1.5	1.1
	SP-2508		48			31	333	2.9	1	0.75
	SP-2506		37			22	291	2.3	0.75	0.55
	SP-2504	1 1/2	24	83	5	15	249	2.2	0.5	0.37
60Hz	SP-2552		456			331	1293	13	10	7.5
	SP-2539		343			251	1020	10.1	7.5	5.5
	SP-2526		228			168	711	6.7	7.5	4
	SP-2515		132			97	480	4.4	3	2.2
	SP-2511		96			71	396	3.6	2	1.5
	SP-2509		79			58	354	3.2	1.5	1.1
	SP-2507		61			45	312	2.8	1	0.75
	SP-2505		44			32	270	2.4	0.75	0.55
	SP-2503		26			19	228	2	0.5	0.37

SP-40 Performance Curve

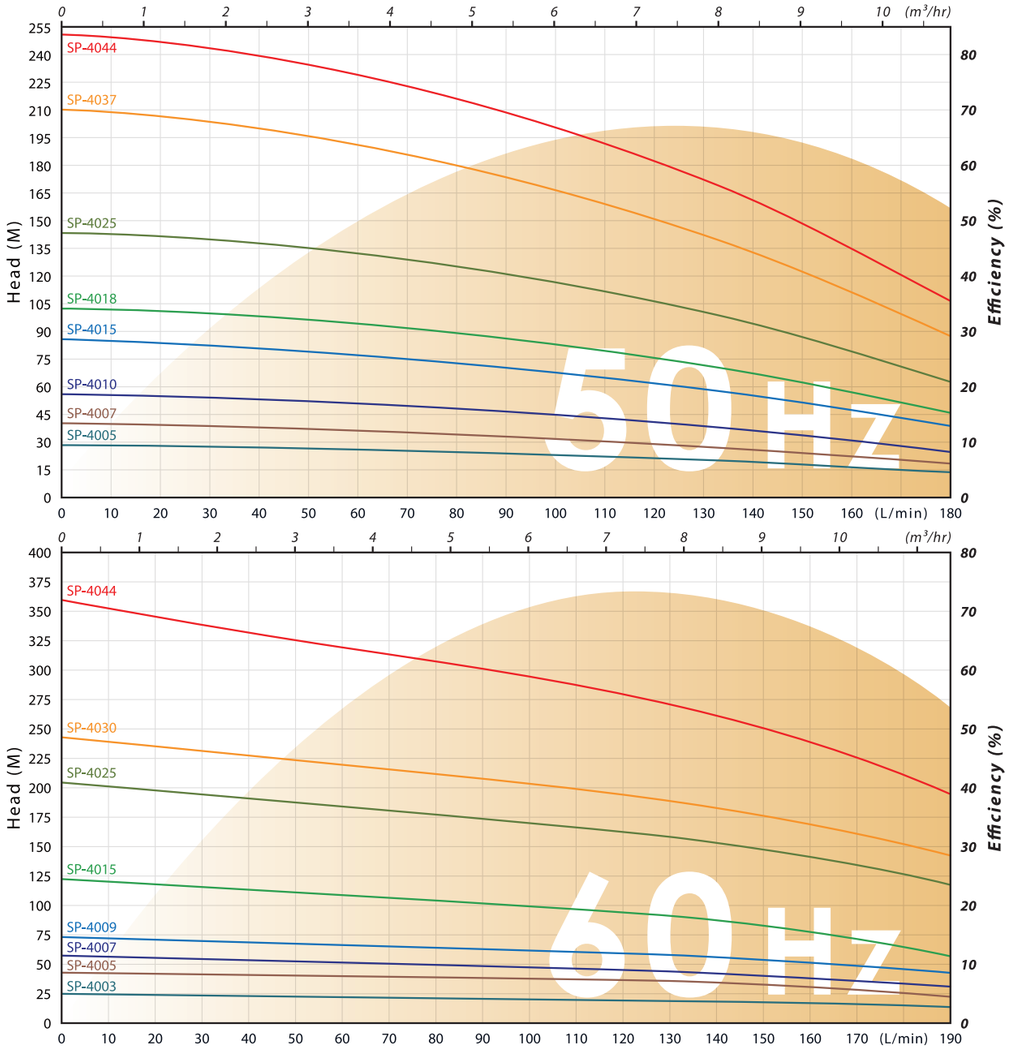


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-4044	2	251	133	8	168	2049	23.7	10	7.5
	SP-4037		210			141	1755	20.2	7.5	5.5
	SP-4025		143			99	1251	14.2	7.5	4
	SP-4018		103			71	957	11.1	5	3
	SP-4015		86			59	831	9.4	3	2.2
	SP-4010		57			38	621	6.9	2	1.5
	SP-4007		40			27	495	5.4	1.5	1.1
	SP-4005		29			19	411	4.5	1	0.75
60Hz	SP-4044		361			269	2023	23.4	15	11
	SP-4030		247			187	1435	16.5	10	7.5
	SP-4025		205			156	1225	14	7.5	5.5
	SP-4015		124			94	805	9	7.5	4
	SP-4009		74			57	553	6.1	3	2.2
	SP-4007		57			44	469	5.1	2	1.5
	SP-4005		41			32	385	4.1	1.5	1.1
	SP-4003		25			19	301	3.1	0.75	0.55

SP-75 Performance Curve

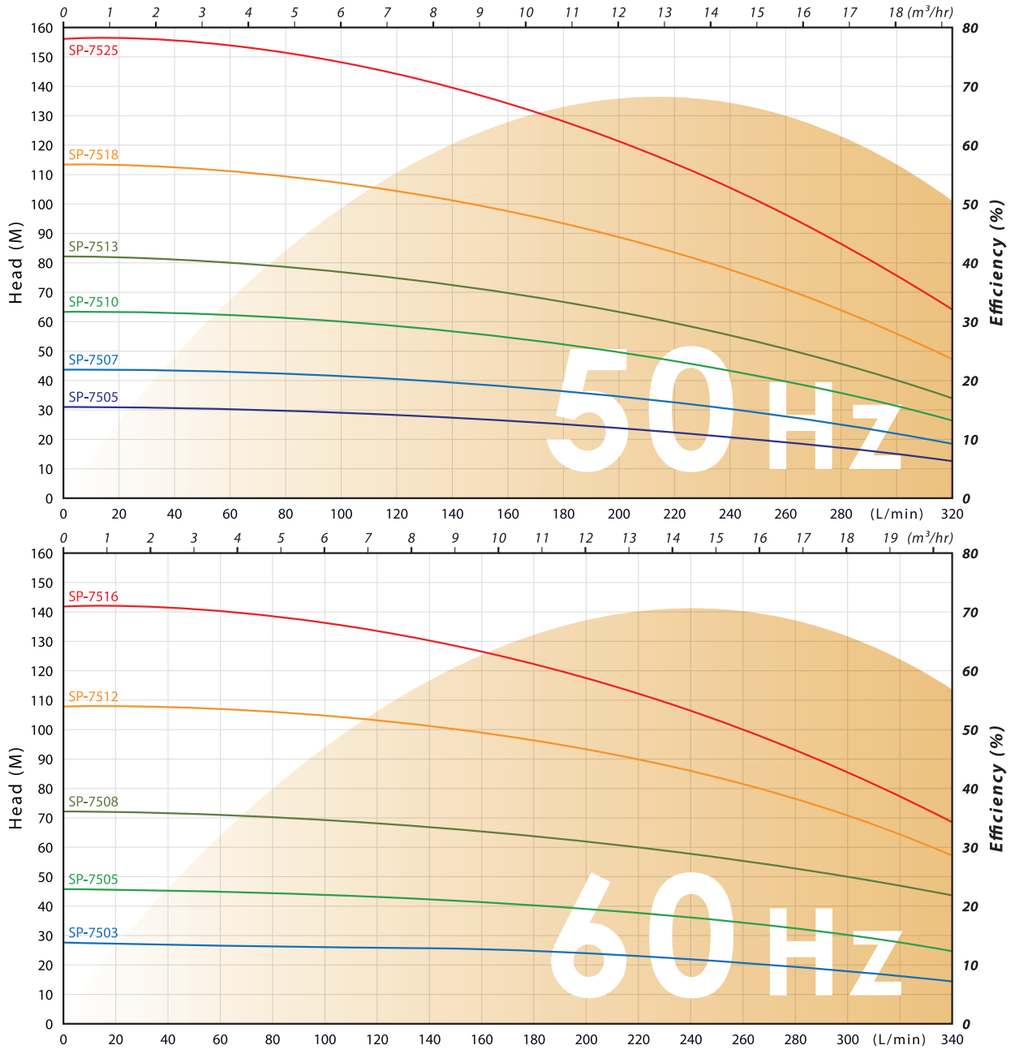


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-7525	2	156	233	14	109	1803	14.9	10	7.5
	SP-7518		113			80	1348	11.4	7.5	5.5
	SP-7513		82			57	1023	8.9	7.5	4
	SP-7510		63			44	828	7.4	5	3
	SP-7507		44			31	633	5.9	3	2.2
	SP-7505		31			21	503	4.9	2	1.5
60Hz	SP-7516		142			109	1218	10.4	10	7.5
	SP-7512		108			88	958	8.4	7.5	5.5
	SP-7508		72			59	698	6.4	7.5	4
	SP-7505		46			37	503	4.9	3	2.2
	SP-7503		28			22	373	3.9	2	1.5

SP-17 Performance Curve

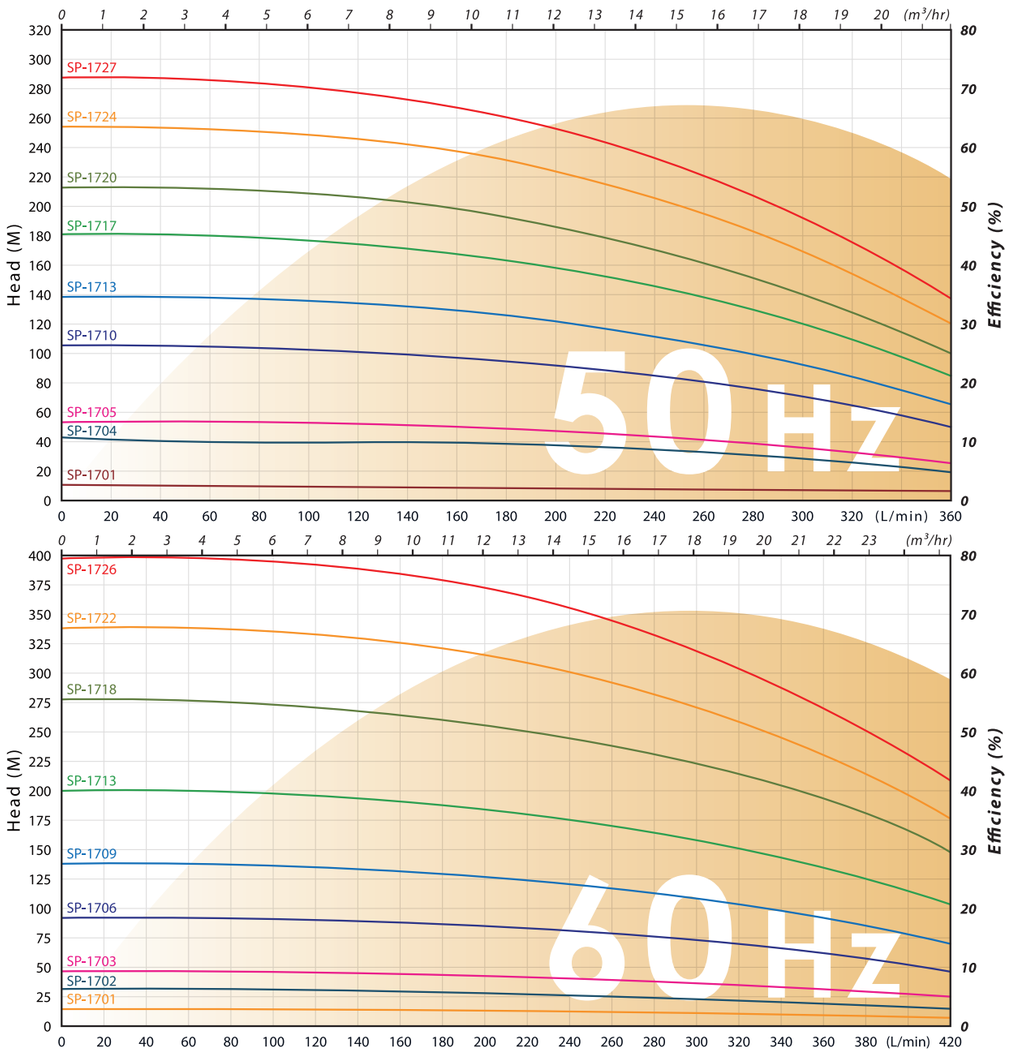

	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-1727	2 1/2	286	282	17	207	1892	38.2	20	15
	SP-1724		255			181	1712	34.3	20	13
	SP-1720		212			150	1472	29.2	15	11
	SP-1717		180			128	1292	25.4	15	9.2
	SP-1713		138			98	1052	20.3	10	7.5
	SP-1710		106			75	857	16.1	7.5	5.5
	SP-1705		53			37	557	9.8	5	3
	SP-1704		43			29	497	8.5	3	2.2
	SP-1701		11			7	317	4.6	0.75	0.55
60Hz	SP-1726		399			330	1832	36.9	30	22
	SP-1722		338			280	1592	31.8	25	18.5
	SP-1718		276			228	1352	26.7	20	15
	SP-1713		200			164	1052	20.3	15	11
	SP-1709		138			112	812	15.1	10	7.5
	SP-1706		93			76	617	11.1	7.5	5.5
	SP-1703		47			37	437	7.3	5	3
	SP-1702		31			25	377	6	3	2.2
	SP-1701		15			13	315	4.5	1.5	1.1

SP-30 Performance Curve

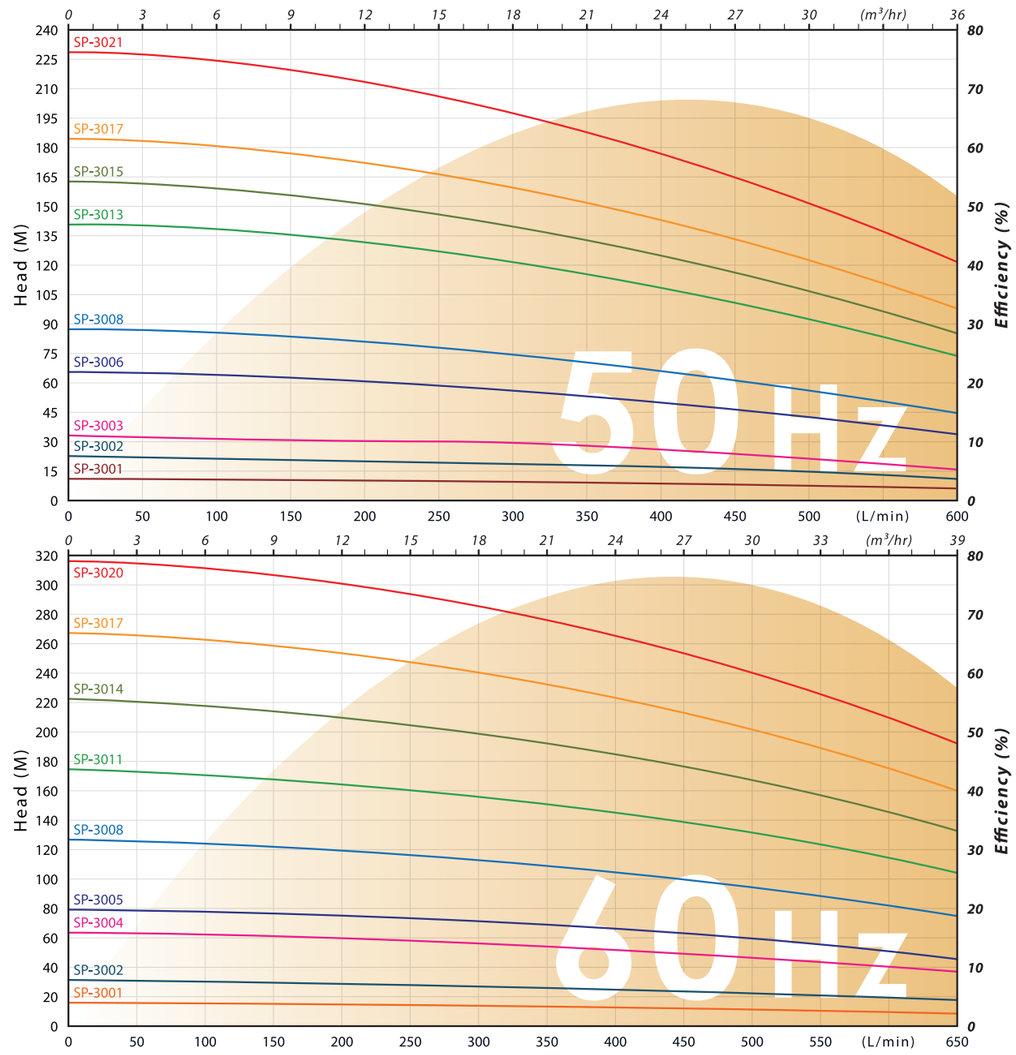


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-3021	3	228	500	30	152	2288	40.2	25	18.5
	SP-3017		183			122	1904	33.2	20	15
	SP-3015		163			106	1712	29.6	20	13
	SP-3013		141			91	1520	26.1	15	11
	SP-3008		87			57	1040	17.3	10	7.5
	SP-3006		65			42	848	13.8	7.5	5.5
	SP-3003		32			21	545	8.2	5	3
	SP-3002		23			16	449	6.5	3	2.2
	SP-3001		11			7	353	4.8	1.5	1.1
60Hz	SP-3020		315			242	2192	38.5	35	26
	SP-3017		266			203	1904	33	30	22
	SP-3014		220			169	1616	28	25	18.5
	SP-3011		173			132	1328	22.6	20	15
	SP-3008		125			96	1040	17.3	15	11
	SP-3005		79			60	752	12	10	7.5
	SP-3004		64			48	641	10.2	7.5	5.5
	SP-3002		31			23	449	6.7	5	3
	SP-3001		16			11	353	5	2	1.5

HUNG PUMP GROUP


WELL PUMP

SP-46 Performance Curve

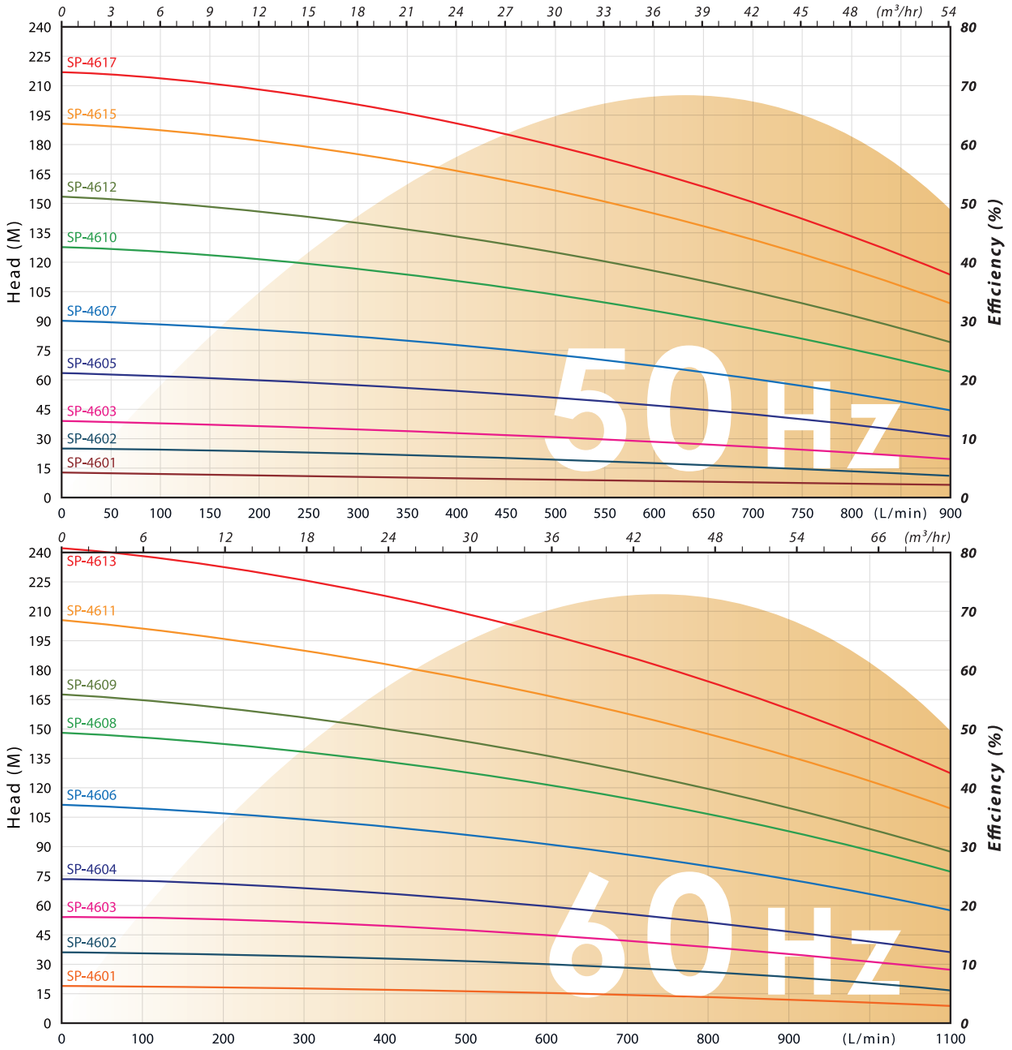

	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-4617	4	219	765	46	147	2214	42.3	35	26
	SP-4615		193			125	1988	37.8	30	22
	SP-4612		154			99	1649	31	25	18.5
	SP-4610		128			81	1423	26.5	20	15
	SP-4607		89			56	1084	19.7	15	11
	SP-4605		64			40	858	15.2	10	7.5
	SP-4603		40			25	617	10.7	7.5	5.5
	SP-4602		25			15	504	8.5	5	3
	SP-4601		13			8	391	6.3	3	2.2
60Hz	SP-4613		242			177	1762	33.3	40	30
	SP-4611		206			151	1536	29	35	26
	SP-4609		168			123	1310	24.3	30	22
	SP-4608		149			109	1197	22	25	18.5
	SP-4606		112			82	971	17.5	20	15
	SP-4604		74			53	745	13	15	9.2
	SP-4603		55			40	632	10.7	10	7.5
	SP-4602		37			27	519	8.5	7.5	5.5
	SP-4601		19			14	390	5.9	5	3

SP-60 Performance Curve

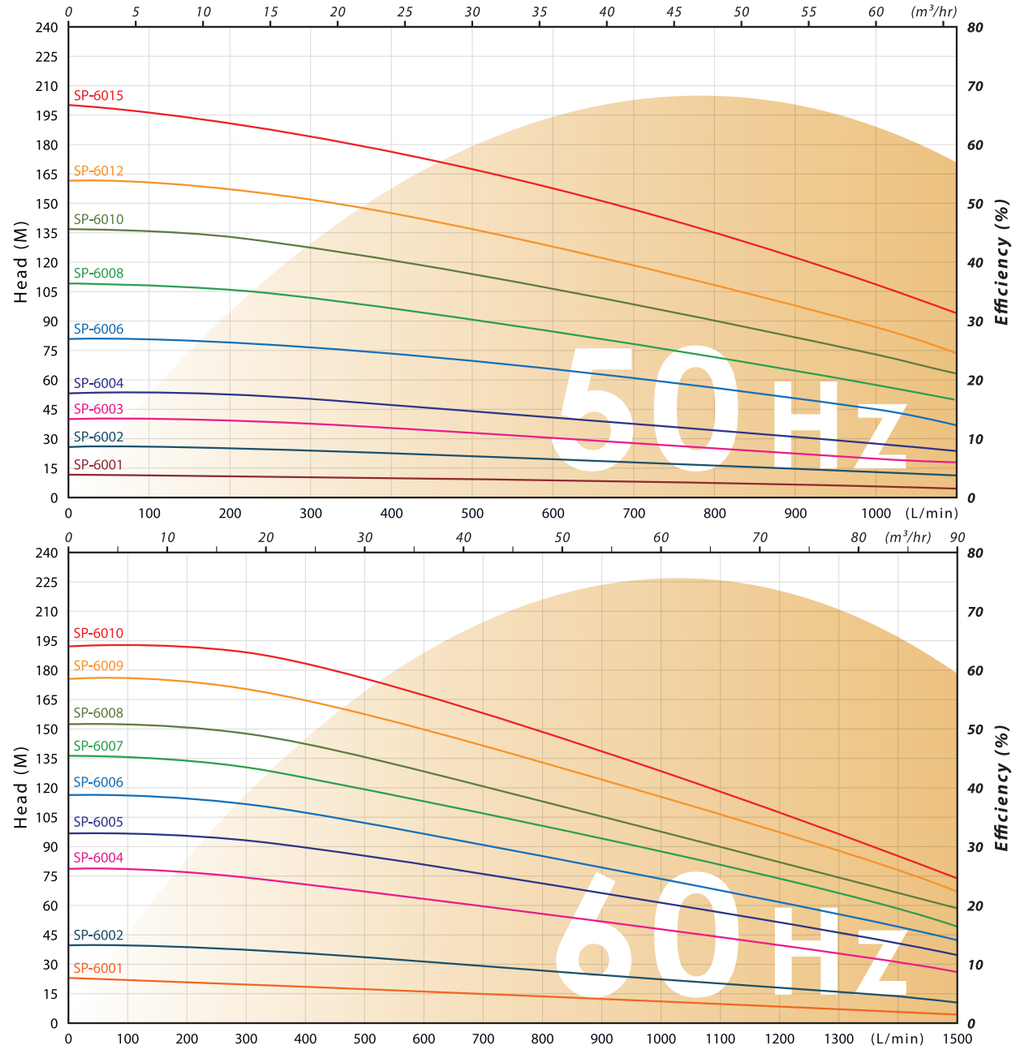


	TYPE	DISCH	TOTAL HEAD	CAPACITY		HEAD	LENGTH	WEIGHT	MOTOR	
		inch	M	L/min	M³/hr	M	mm	KG	HP	Kw
50Hz	SP-6015	4	203	1000	60	110	1988	38.2	35	26
	SP-6012		162			88	1649	31.4	30	22
	SP-6010		136			74	1423	26.9	25	18.5
	SP-6008		108			58	1197	22.3	20	15
	SP-6006		81			45	971	17.8	15	11
	SP-6004		53			29	745	13.2	10	7.5
	SP-6003		40			20	617	11	7.5	5.5
	SP-6002		27			13	504	8.7	7.5	4
	SP-6001		12			6	391	6.4	3	2.2
60Hz	SP-6010		194			128	1423	26.9	40	30
	SP-6009		176			115	1310	24.6	35	26
	SP-6008		153			99	1197	22.3	30	22
	SP-6007		136			87	1084	20.1	30	22
	SP-6006		116			75	971	17.8	25	18.5
	SP-6005		97			61	858	15.5	20	15
	SP-6004		78			48	745	13.2	15	11
	SP-6002		40			22	504	8.7	7.5	5.5
	SP-6001		22			10	391	5.9	7.5	4

APP

www.pumps.com.tw


4"

SP- 05 / 10 / 18 / 25 series

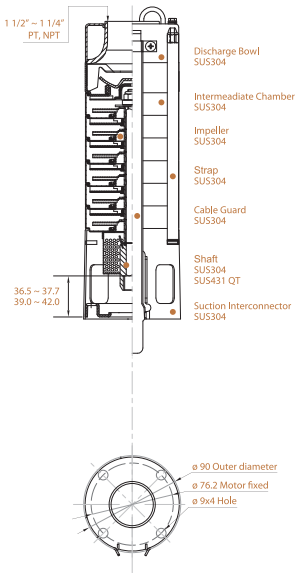


4"


SP-40 series

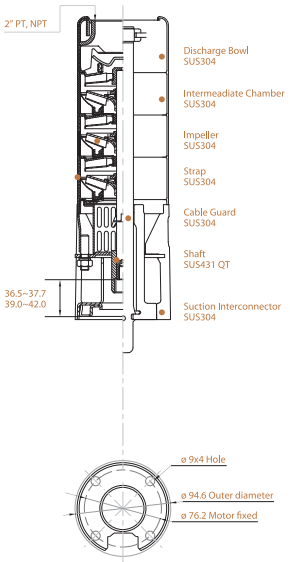

4"


SP-75 series

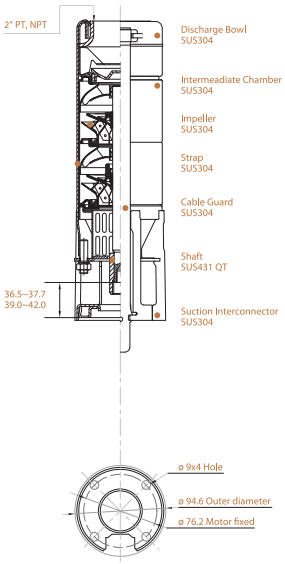

4" Features	6" Features
	
	
	
	
	


6"

SP-17 series

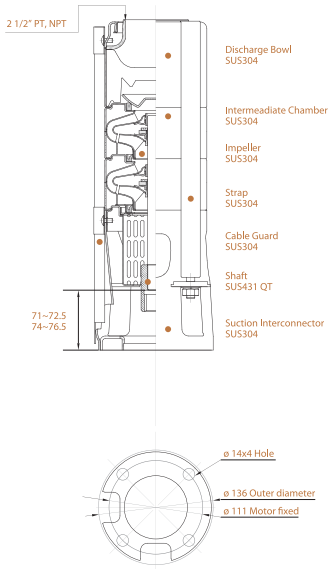


6"

SP-30 series

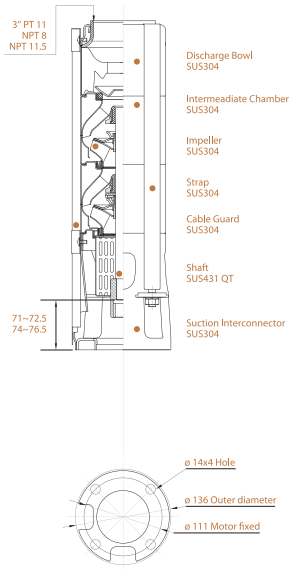


6"

SP-46 series

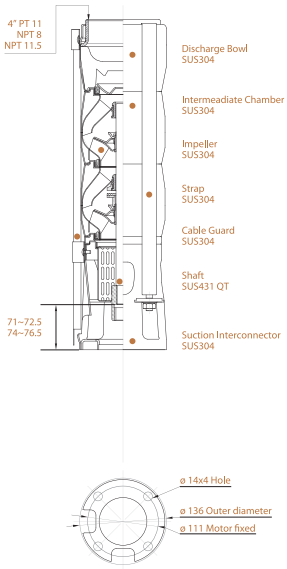

6"

SP-60 series

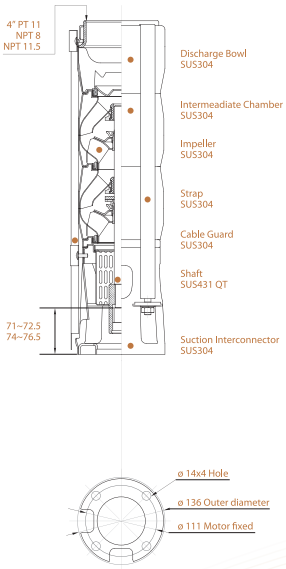

HUNG PUMP GROUP

TEL : (886)3-371-3969 FAX : (886)3-371-3996
E-MAIL : hungpump@ms9.hinet.net
16 Lien-Ming Street, Ba-De City 334 , Taoyuan, Taiwan